



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁵ : H04M 3/50, H04Q 7/04	A1	(11) International Publication Number: WO 91/03900 (43) International Publication Date: 21 March 1991 (21.03.91)
(21) International Application Number: PCT/US90/04693 (22) International Filing Date: 22 August 1990 (22.08.90) (30) Priority data: 400,679 30 August 1989 (30.08.89) US (71) Applicant: MOBILE TELECOMMUNICATION TECHNOLOGIES [US/US]; Post Office Box 2469, Jackson, MS 39225 (US). (72) Inventors: BHAGAT, Jai, P. ; 155 Rolling Meadows Drive, Jackson, MS 39211 (US). VENCE, Robert, L. ; 2326 S. Rolfe Street, Arlington, VA 22202 (US). HAYS, William, D. ; 2345 Twin Lakes Circle, Jackson, MS 39211 (US).	(74) Agents: PATTERSON, Herbert, W. et al.; Finnegan, Henderson, Farabow, Garrett & Dunner, 1300 I Street N.W., Washington, DC 20005-3315 (US). (81) Designated States: AT, AT (European patent), AU, BB, BI (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CM (OAPI patent), DE* DE (European patent)*, DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), HU, HU (European patent), JP, KP, KR, LK, LU, LU (European patent), MC, MG, ML (OAPI patent), MR (OAPI patent), MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TI (OAPI patent), TG (OAPI patent). <p>Published <i>With international search report.</i></p>	

RECEIVED
NOV 20 2000
Technology Center 2600

(54) Title: A METHOD AND APPARATUS FOR PROCESSING PAGES

(57) Abstract

A paging system includes a digital switch (204) an interface processor (202), and a central computer (200). The interface processor prompts a caller to input a desired function code and in response, performs the desired function or instructs the digital switch to route the call to a different portion of the paging system which may includes a voice mailbox unit (208) for recording voice messages. The digital switch, in response to an instruction from the interface processor, can establish a telephone connection to an outside number for a caller already connected to the paging system.

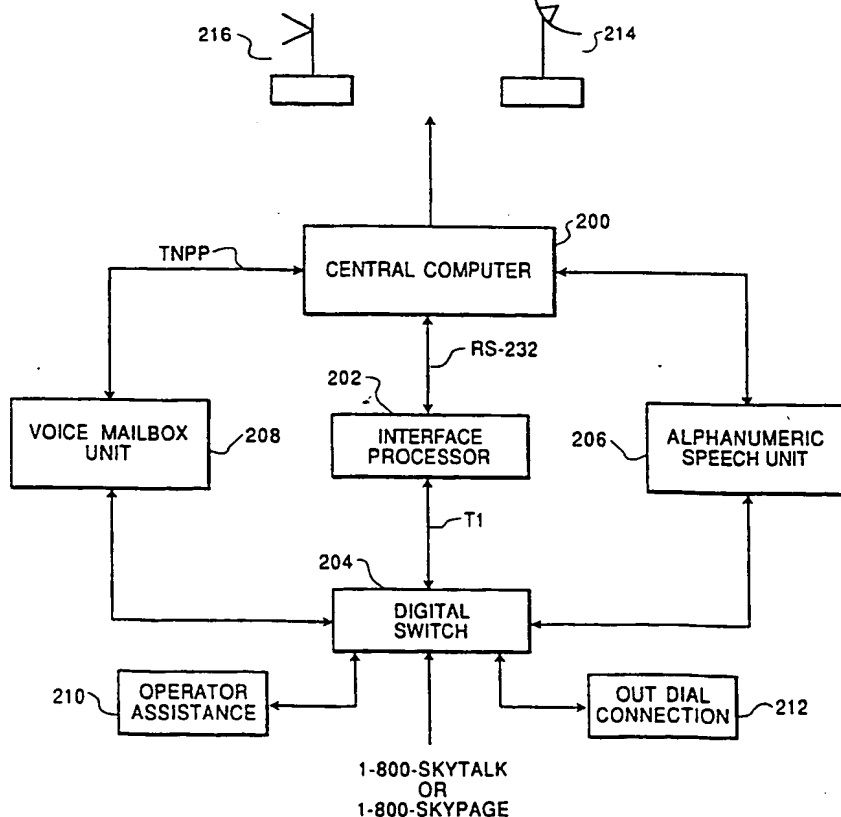

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Fasso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
DE	Germany	LU	Luxembourg	TD	Chad
DK	Denmark			TC	Togo
				US	United States of America

-1-

DescriptionA Method and Apparatus for Processing PagesBackground of the InventionTechnical Field

The present invention relates to a paging system for transmitting numeric and alphanumeric pages and for recording voice messages.

Background Art

Paging systems are known and used to transmit pages on both a regional and national level. Each subscriber to a paging system is issued a pager having a unique pager identification number (PIN) and subscribes to selected services offered by the paging system.

Many conventional paging systems include a central compute for storing subscriber information, including PIN number, security code and types of services subscribed to. Pages called into these systems are processed by the central computer, sent a transmitter and broadcast in the region corresponding to the subscriber's location. Transmission of the pages may be performed by satellite which allows subscribers to be paged anywhere in the country.

One such paging system is the National Satellite Paging System (NSP). As shown in Fig. 1, the NSP comprises a central computer 100, an alphanumeric speech unit 102, a voice mailbox unit 104 and channel banks 106. The central computer 100 comprises, for example, a MicroVAX computer available from Digital Equipment Corporation which, as described above, stores subscriber information and processes pages to be broadcast. This processing includes preparation of the pages into the proper protocol for transmission to a satellite (not shown) via satellite uplink 108 or to a local transmitter 110. In addition, the central computer 100 provides administrative and accounting functions, such as billing functions. The alphanumeric speech unit 102 is comprised of DECTALK interface units, also available from Digital Equipment Corporation, which provides voice

-2-

prompting to a caller wishing to leave a page for a subscriber, in accordance with instructions from the central computer 100. The voice mailbox unit 104 comprises a BBL EVXTRA unit, available from BBL Industries, which provides voice prompting for a caller wishing to leave a recorded message for a subscriber. Channel banks 106 comprise intelligent T-1 channel banks available from Newbride Corp. and convert digital T-1 input lines into analog lines.

The NSP is capable of processing both numeric and alphanumeric pages and recording voice messages. The numeric and alphanumeric page service provided by the NSP is termed the "SKYPAGER"® service and the voice message service is termed the "SKYTALK"® service. An example of each service and the corresponding system and processing will now be described.

If a caller wishes to page a subscriber with a numeric or alphanumeric page, the caller is connected with the NSP system by dialing 1-800-SKYPAGE. A numeric page generally refers to a message consisting only of numbers, such as a phone number at which the caller can be reached, and an alphanumeric page refers to any message including, but not limited to, numbers, letters, symbols and punctuation. The call comes into the alphanumeric speech unit 102 via a digital T1 line and channel bank 106. In response to the call, the alphanumeric speech unit 102 establishes a connection with the central computer 100 via one of several RS-232 ports. The central computer 100 instructs the alphanumeric speech unit 102 to welcome the caller to SKYPAGE and sequentially instructs the caller to enter the PIN of the subscriber and a numeric or alphanumeric message (usually a return phone number). The central computer 100 also reviews the subscriber's file (corresponding to the input PIN) to determine what type of services the subscriber is entitled to receive, processes the page into the appropriate protocol and transmits the page to the local transmitter 110 or a satellite uplink 108.

If a caller wishes to leave a voice message for a subscriber, he or she does so by dialing 1-800-SKYTALK. This call comes into the voice mailbox unit 104 via a digital T1 line and channel bank 106. In response to the call, the voice mailbox

-3-

unit 104 sequentially instructs the caller to enter the PIN of the subscriber and a message. The message is recorded, for example on disk drives, at a storage area dedicated to the subscriber. Once the message is obtained and the caller disconnected, the voice mailbox unit 104 establishes communication with the central computer 100 using a Telocator Network Paging Protocol (TNPP, which is an open protocol for communications between paging terminals developed by Telocator) and informs the central computer 100 that the subscriber corresponding to the PIN entered by the caller has a message stored in the voice mailbox unit 104. The central computer 100 updates the subscriber's file with this information and transmit a page to the subscriber instructing the subscriber to call into SKYTALK and retrieve the message.

To retrieve a SKYTALK message, the subscriber dials 1-800-SKYTALK and, in response to voice prompts from the voice mailbox unit 104, inputs the appropriate information (PIN and function code) to effect play back of the message.

The NSP system is thus an efficient and comprehensive paging system offering its subscribers a wide range of services. However, the NSP system suffers from a number of disadvantages which limit its performance and unnecessarily elevate its costs. Specifically, as described above with respect to numeric and alphanumeric pages, the central computer 100 provides all of the page processing and administrative and accounting functions as well as the processing for SKYTALK and SKYPAGER transmission services. Expansion of the system is, therefore, very expensive since a larger central computer is required for expansion. Further, the central computer 100 can only process a limited number of calls at one time, which limits its ability to meet subscriber demands.

The NSP system is also limited in its functionality which tends to inconvenience subscribers. While the NSP system does provide both SKYPAGER and SKYTALK services, a subscriber must use two different phone numbers to get these two different services. The system does not enable a subscriber to switch between these two services after an initial call into the system.

SUBSTITUTE SHE

-4-

For example, if a subscriber wishes to retrieve both numeric pages (which may be held for later retrieval) and voice messages, the subscriber must first call 1-800-SKYPAGE to retrieve the numeric pages then hang up and call 1-800-SKYTALK to retrieve the voice messages. This is both inconvenient and expensive.

Furthermore, the NSP system does not offer a subscriber the ability to dial out a phone number of a caller who has left a message and establish a phone connection via the NSP system to return the caller's message. For example, if a subscriber calls into SKYPAGER to retrieve numeric pages and desires to immediately return one of the phone calls, the subscriber must memorize or write down the phone number, assuming that the number is not already known, hang up the phone and dial the person directly. This, again, is both inconvenient and expensive.

Summary of the Invention

Accordingly, it is an object of the present invention to provide a paging system which is readily expendable in response to increases in demand.

It is another object of the present invention to provide a paging system having expanded functionality and providing a variety of services which are both convenient and cost saving to subscribers.

To accomplish these and other objects, and in accordance with the purposes of the invention as embodied and broadly described herein, a paging system is provided comprising digital switch means for receiving phone calls via phone lines connected thereto and for switching said phone calls to appropriate portions of said paging system; interface processor means for providing voice prompts to callers and for performing paging functions based on function codes input by the caller; and central computer means for storing subscriber files and for preparing pages according to a selected protocol.

Brief Description of the Drawings

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate a presently preferred embodiment(s) and method of the invention and, together with the general description given above and the

-5-

detailed description of the preferred embodiment(s) and method given below, serve to explain the principles of the invention. Of the drawings:

Fig. 1 is a block diagram of the National Satellite Paging System;

Fig. 2 is a block diagram of a preferred embodiment of the paging system of the present invention;

Fig. 3 is a flow chart of the system processing for performing SKYPAGE and SKYTALK services in accordance with the preferred embodiment of the present invention; and

Fig. 4 is a flow chart of the system processing for performing a switching function in accordance with the preferred embodiment of the present invention.

Description of the Preferred Embodiment

Reference will now be made in detail to the presently preferred embodiment(s) and method(s) of the invention as illustrated in the accompanying drawings.

As shown in Fig. 2, a paging system in accordance with the present preferred embodiment of the present invention comprises a central computer 200, an interface processor 202, a digital switch 204, an alphanumeric speech unit 206 and a voice mailbox unit 208.

The central computer 200 may comprise, for example, a DEC MicroVAX and performs page processing and administrative and accounting functions similar to the conventional NSP system. However, due to the interface processor 202 and digital switch 204, the central computer 200 of the present invention does not perform caller interface processing. This frees up the central computer 200 to perform additional processing functions.

The interface processor 202 may comprise, for example, a PERIPHONICS VPS 9500 computer and provides initial voice prompting for any incoming call. In addition, the interface processor 202 responds to function codes input by callers to perform a variety of services.

The digital switch 204 may comprise, for example, a Harris, Inc. digital switch for switching calls to the appropriate part of the system in accordance with instructions

-6-

from the interface processor 202. The use of such a digital switch 204 frees up the interface processor ports to handle additional incoming calls. Depending upon the function code input by the caller, the digit switch 204 may transfer the call to the voice mailbox unit 208 to provide a voice message service such as the SKYTALK service, to a system operator 210 if the caller needs assistance, to an "outdial" line 212 (described below) or, in the event the subscriber can receive alphanumeric pages, to the alphanumeric speech unit 206.

Operation of the paging system in accordance with the preferred embodiment will now be described for both SKYPAGER and SKYTALK services with reference to the flowchart of FIG. 3. When either a SKYPAGER or SKYTALK call is made into the paging system, it is received by the digital switch 204 and forwarded to one port of the interface processor 202. The interface processor analyzes the call to determine if it is a SKYPAGER or SKYTALK call 300. If the call is a SKYPAGER call, a voice prompt is provided by the interface processor 202 welcoming the caller to SKYPAGER 302 and instructing the caller to input a subscriber PIN 304. Interface processor 202 then reads the PIN 306. Once the interface processor 202 has the PIN, it establishes a connection via RS-232 lines with the central computer 200, 308, and instructs the central computer 200 to send the subscriber file corresponding to the PIN to the interface processor 202, 310. The central computer 200 downloads the subscriber file to the interface processor 202 and is then free to perform other processing functions.

Once the interface processor 202 has the appropriate subscriber file, it provides a voice prompt to the caller to input a desired function code 312. After the caller inputs the function code, the interface processor 202 determines whether the subscriber subscribes to the service corresponding to the function code. For example, if the caller inputs a function code corresponding to sending a national page, but the subscriber does not subscribe to the national page service of the paging system the interface processor 202 would inform the caller that this function 316 cannot be performed. If the subscriber does

-7-

subscribe to this service, the interface processor 202 determines if the function is one that is executed by the interface processor 202, 318. If the interface processor 202 does perform the function (for example providing a numeric page), it execute the function 320; if not, the interface processor 202 sends the call to the digital switch 204 with instructions to transfer the call to the appropriate part of the paging system 322. For example, if the caller inputs a function code corresponding to a request for operator assistance (which is not performed by the interface processor 202) the interface processor 202 instructs the digital switch 204 to establish a line connection to the operator 210 and transfers the call to the digital switch 204 with instructions to forward the call to the operator 210. The interface processor 202 also instructs the caller to press a selected key (for example a "*" key) to request further services after the operator assistance service 323.

If the initial inputs call is a SKYTALK call, the interface processor 202 welcomes the caller to SKYTALK 324 and instructs the caller to input the subscriber's PIN 326. The interface processor 202 then reads the PIN 328, establishes a connection with the central computer 200 via RS-232 lines 330 and instructs the central computer 200 to transfer the subscriber file corresponding to the PIN to the interface processor 202, 332. The interface processor 202 then provides a voice prompt to the caller providing, for example, three options 334: to record a message, press 1; to retrieve a message press 2; to return to SKYPAGER, press 3. If the caller inputs a 3, the interface processor 202 returns to the SKYPAGER processing routine described above and voice prompts the caller to input a desired function code 312. If the caller inputs a 1 or 2, the interface processor 202 instructs the digital switch 204 to find an available line to the voice mailbox unit 208, 338 and 340. If a line is available, the digital switch 204 transfers the call to the voice mailbox unit 208, 344 and instructs the caller to press a selected key (for example a * key) to request further services after the SKYTALK service is complete 323. If a line is not available to the voice mailbox unit 208, the caller is so

SUBSTITUTE SHEET

-8-

instructed 342. The voice mailbox unit 208 may comprise a BBL EVXTRA computer and processes SKYTALK calls in a manner similar to that of the NSP system described above.

The foregoing description shows the ability of the paging system of the present invention to switch back and forth between SKYPAGER and SKYTALK services with just one call into the system. Further, the preferred embodiment of the present paging system can switch directly from the SKYPAGER service to SKYTALK service in response to the appropriate function code. For example, if a subscriber has called in to retrieve numeric pages (SKYPAGER service), but also wants to retrieve his recorded messages from the voice mailbox unit 208 (SKYTALK service), after the interface processor was executed a "review held pages" function 320 (described below), the subscriber, in response to a voice prompt to input a desired function code 312, need only insert a SKYTALK function code. In response, the interface processor 202 next processes step 334 and continues processing the SKYTALK request in the manner described above.

As indicated above, the present paging system can perform a "hold pages" function and a "review held pages" function. If a subscriber does not wish to be paged for a period of time, he or she simply calls into the paging system and inputs the "hold pages" function code. The subscriber can then call in at a later time to review the pages held by inputting a "review held pages" function code.

A further feature of the paging system of the present invention is its ability to switch a presently connected caller to an outside phone line without requiring the caller to disconnect from the paging system and dial the person directly. This "outdial" feature will be described in conjunction with a "review held pages" function and the flowchart of FIG. 4.

As previously indicated, a subscriber wishing to review held pages simply inputs the appropriate function code. The interface processor 202 voice prompts the caller to input the function code 400. If the function code corresponds to the "review held pages" function 402 the interface processor 202 informs the subscriber that the system will review the held pages

-9-

406, reads back the first page to the subscriber 408 and pauses 410.

The "outdial" function can be initiated by depressing a selected key, for example a "1" key 412. If the subscriber inputs a "1" during the "review held pages" processing the interface processor 202 informs the subscriber that he or she will receive the "outdial" service 414 and instructs the subscriber to enter the phone number he or she wishes to call 416. After the subscriber inputs the phone number, this phone number is displayed to the subscriber 418 and the subscriber is instructed to depress, for example, the "*" key to obtain further services after the phone call. Assuming the subscriber does not cancel the call, the interface processor 202 instructs the digital switch 204 to find an available "outdial" phone line 420. If a phone line exists, the subscriber's call is transferred to the digital switch 204, 422 and 424 and the "outdial" connection 212 is made. If no "outdial" line is available, the subscriber is so informed 422 and 426.

If the subscriber does not input a "1" to receive the "outdial" service while the pages are being reviewed, the interface processor 202 determines if there are any messages remaining for review 430. If none remain, the subscriber is so informed 434 and voice prompted to input a new function code 400. If additional messages remain, these messages are sequentially read to the subscriber 432.

While the foregoing description describes the "outdial" function during a "review held pages" function, the "outdial" function can be provided anytime a caller is connected to the paging system by inputting a selected "outdial" function code in response to a voice prompt to do so. The system then performs the "outdial" processing in a manner described above with respect to steps 414 through 426 of FIG. 4. This feature of the present invention is advantageous in that it allows a subscriber to make one call into the paging system and receive the "outdial" service without having to disconnect from the system and dial a person directly.

-10-

Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details, representative devices, and illustrative examples shown and described. Accordingly, departures may be made from such details without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

-11-

Claims

1. A paging system for processing pages, comprising:
central computer means for storing subscriber files and for preparing pages according to a selected protocol;
digital switch means for receiving phone calls from callers via phone lines connected thereto and for switching said phone calls to appropriate portions of said paging system; and
interface processor means for providing voice prompts to callers and for performing paging functions based on function codes input by said callers.

2. A paging system according to claim 1, further comprising voice mailbox means connected to said digital switch means, and said central computer means, for recording and playing back voice messages.

3. A paging system according to claim 1, further comprising alphanumeric speech means, connected to said digital switch means and said central computer means, for performing alphanumeric paging functions.

4. A paging system according to claim 1, wherein said digital switch means provides a phone connection between a caller and a selected phone number in response to an instruction from said interface processor.

5. A paging system according to claim 2, wherein said digital switch means switches a caller between said interface processor means and said voice mailbox means in response to an instruction from said interface processor.

6. A method of processing pages in a paging system including a digital switch and an interface processor, comprising the steps of:

receiving a phone call from a caller at said digital switch forwarding said phone call to said interface processor;
instructing said caller to input a function code;
performing a function corresponding to said function code said function code is one of a first set of function codes; and

SUBSTITUTE SHEET

-12-


switching said phone call to a different portion of said paging system if said function code is not one of said first set of function codes.

7. A method according to claim 6, wherein said phone call is switched to a voice mailbox unit in response to a corresponding function code.

8. A method according to claim 6, wherein said phone call is switched to an "outdial" phone line in response to a corresponding function code.

SUBSTITUTE SHEET

FIG. 1
PRIOR ART

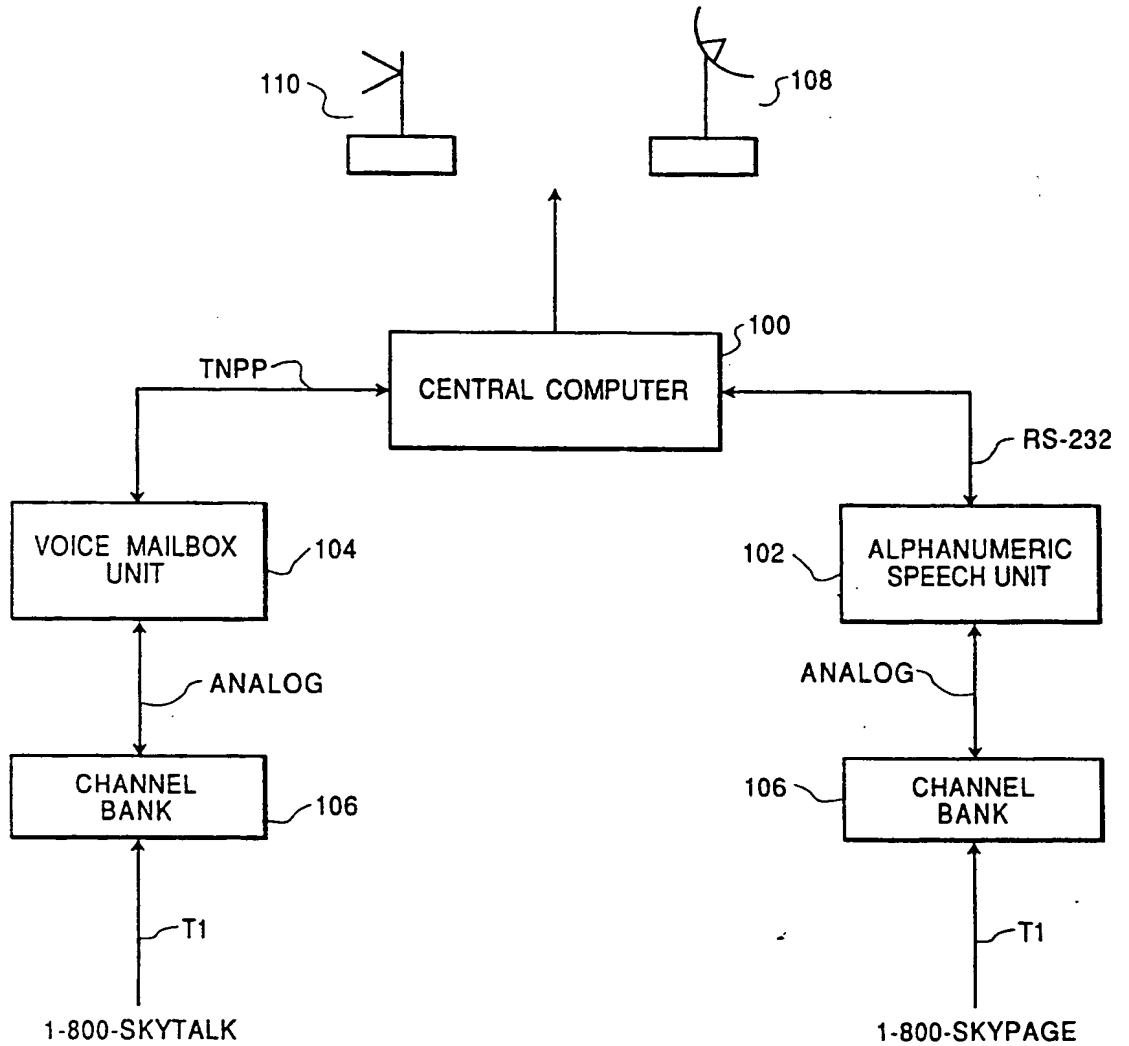

SUBSTITUTE SHEET

FIG.2

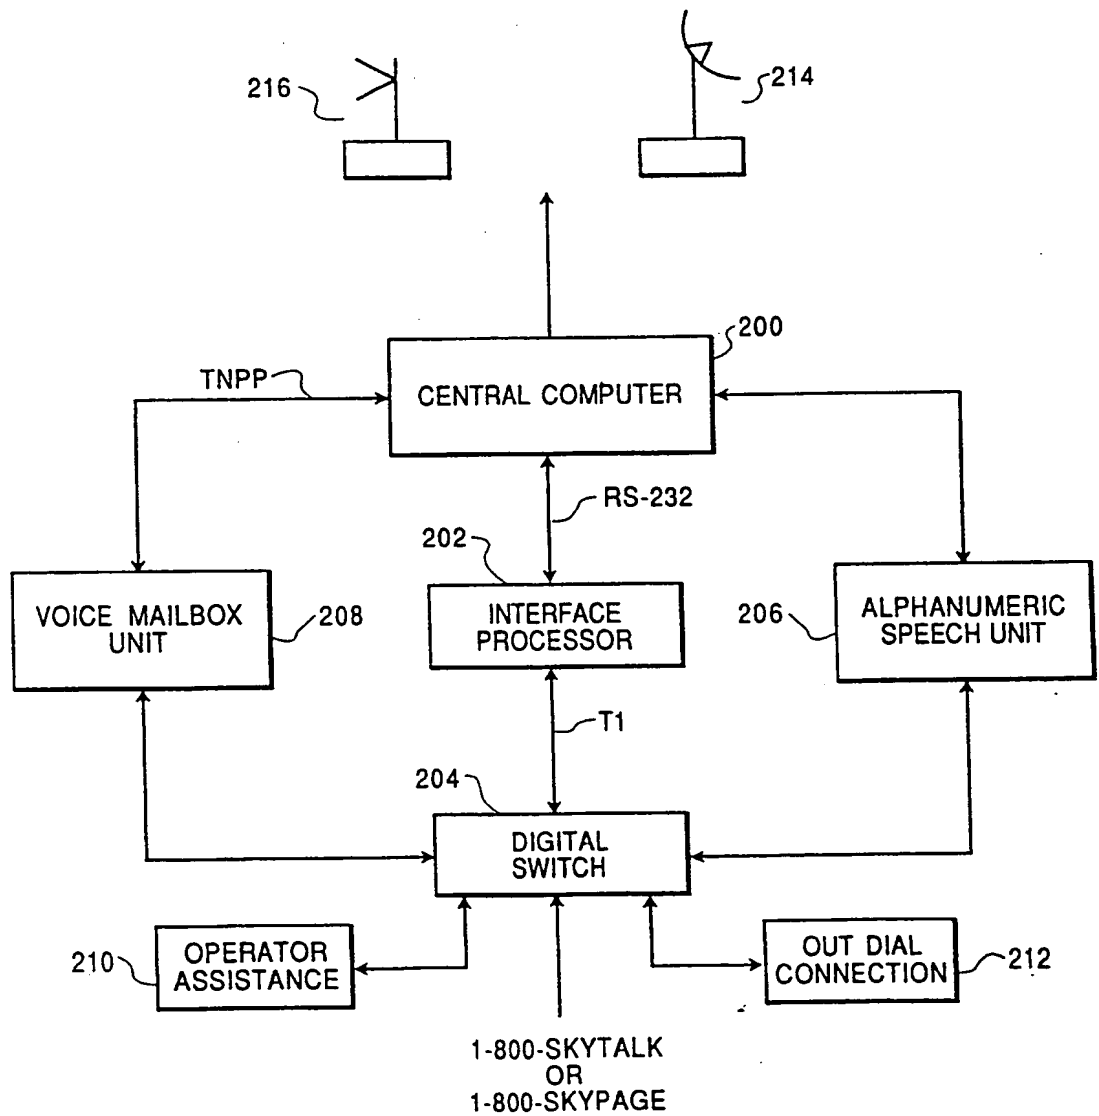


FIG. 3



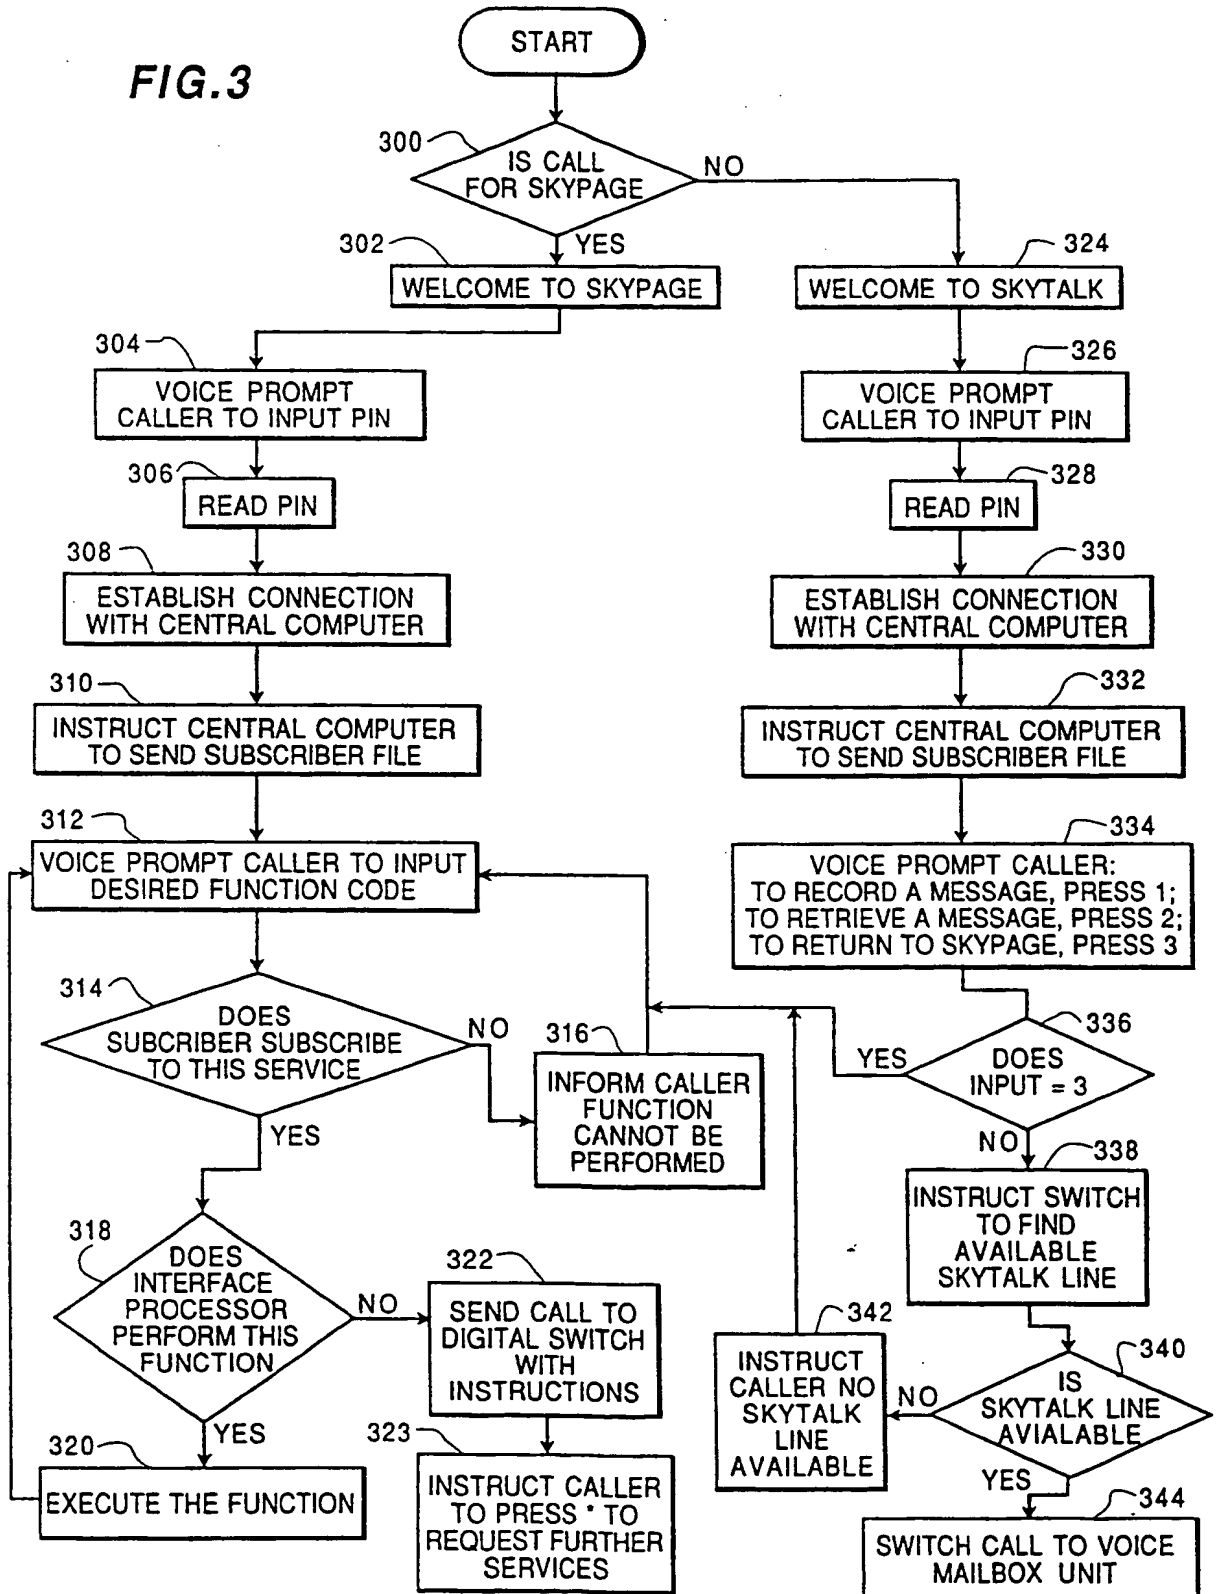


FIG. 4

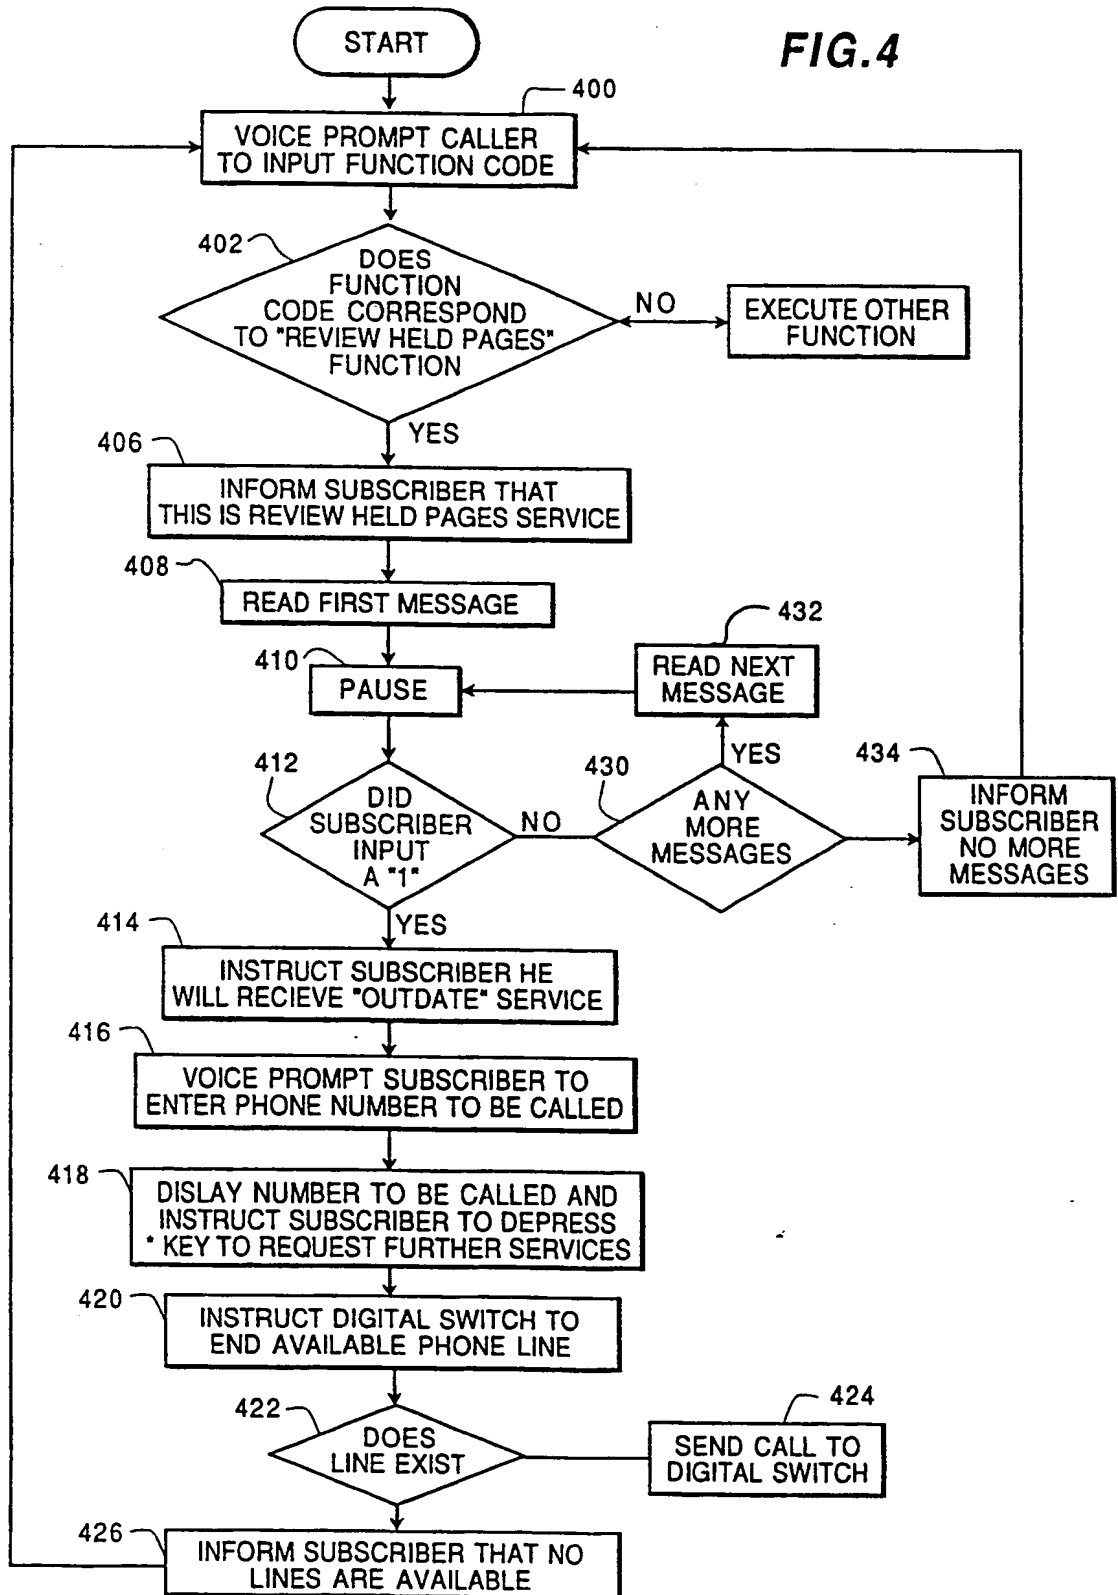

INTERNATIONAL SEARCH REPORT

International Application No **PCT/US90/04693**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC(5): H04M 3/50; H04Q 7/04		
US CL.: 379/57, 89; 340/825.44, 825.48		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
US	379/56, 57, 58, 63, 67, 88, 89, 211; 340/311.1, 825.44, 825.48	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X	US, A, 4,713,808 (Gaskill et al.) 15 DECEMBER 1987; See FIGS. 2A and 4, and column 7, lines 53-68 and column 8, lines 1-16 and 51-55.	1-8
A	US, A, 4,811,379 (Grandfield) 07 MARCH 1989	
A, P	US, A, 4,868,560 (Oliwa et al.) 19 SEPTEMBER 1989	
A, P	US, A, 4,876,707 (Hashimoto) 24 OCTOBER 1989	
A, P	US, A, 4,882,744 (Hashimoto) 21 NOVEMBER 1989	
A, P	US, A, 4,885,577 (Nelson) 05 DECEMBER 1989	
A, P	US, A, 4,926,460 (Gutman et al.) 15 MAY 1990	
A, P	US, A, 4,941,167 (Cannalte et al.) 10 JULY 1990	
A, P	US, A, 4,942,598 (Davis) 17 JULY 1990	
<p>¹⁵ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ¹⁹		Date of Mailing of this International Search Report ²⁰
05 NOVEMBER 1990		26 DEC 1990
International Searching Authority ¹		Signature of Authorized Officer ²⁰
ISA/US		 THOMAS W. BROWN

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)